


B.L.W. Visser B.V.

Cromhoffsbleekweg 146  
7513 EW ENSCHEDE  
Nederland

Tel: +31 (0)53 4319661  
E-mail: info@blwvisser.nl  
Internet: www.blwvisser.nl

# 3i Plus

## High Temperature Handheld Infrared Thermometer

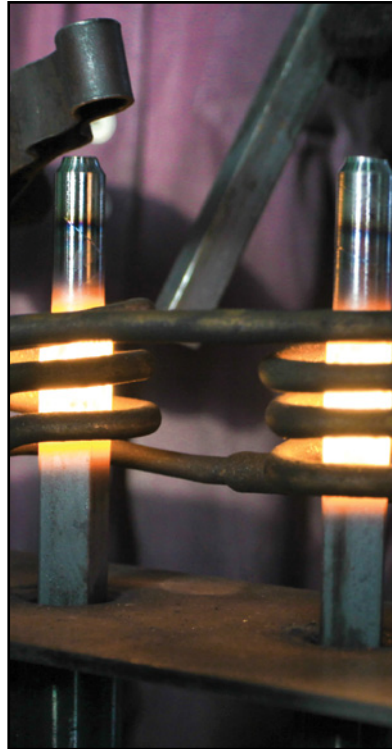

***Stronger Simpler Safer***

## Raynger® 3i Plus

The Raytek® Raynger 3i Plus infrared thermometer is a new generation of portable products designed in accordance with industry standards to meet process performance requirements in hot environments. It combines high-precision, superior Distance-to-Spot (D:S) ratio with high accuracy and a robust feature set that provides excellent temperature measurement solutions for process temperature detection and fault previewing.

The 3i Plus has been ergonomically designed with comfort grip to ensure firm grasp by the operator. Additional features for enhanced

ease-of-use include Red Dot sighting technology for accurate targeting when high temperature targets are not visible using laser sighting alone. DataTemp® Windows PC software supports real-time communication, data storage, graphing and analysis. This innovative thermometer includes a mobile app for quick data transfer and collaboration, and can be used temporarily as an online thermometer.



# Stronger



## *Need a rugged, durable infrared thermometer?*

- Rugged design reduces risk of damage and minimizes service costs – withstands 1 m (3.2ft) drop
- More data sampling, ensuring faster processing time
- Longer operational cycle (24 h) - Rechargeable batteries
- Flexible for wide range of applications/temperatures
- Highly accurate temperature measurement

# Simpler



## *Need an easy to use thermometer?*

- Intuitive user interface for easy parameter set-up, enabling 'on-site' display of data analysis and trending
- Dual laser for fast and simple aiming at the measurement target
- Fast and easy data transfer to PC or smartphone, using USB or Bluetooth® (with Bluetooth versions)


# Safer




## *Want a safer work environment?*

- High optical resolution ensures accurate temperature readings at longer distances
- "Red Nose" heat resistant warning-detector and alarm ensures operator safety and efficiency
- Dual laser and scope sighting, even against "red hot" backgrounds

# 3i Plus Software & Mobile App

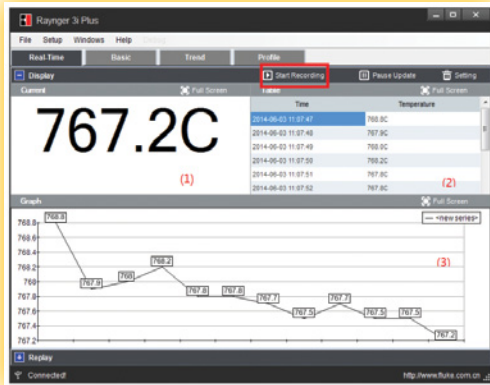

- Easy to log the date from portable thermometer
- Clear temperature display with value and trend
- Fast selection for default configuration

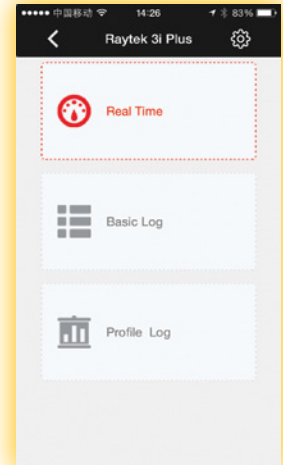

- Simple to capture and email the temperature report, on site with smart phone app
- View the temperature and trend in real time

(Bluetooth versions, only)

3i Plus 1M & 2M are portable thermometers designed for high temperature applications. They cover a temperature range of 400 - 3000 °C (752 - 5432 °F) (depending on the model). Superior Distance-to-Spot (D:S) ratio allows users to measure high temperature targets from longer distances, ensuring accurate temperature readings and operator safety.

## Applications:

- Iron
- Steel
- Metal Refining
- Foundry and Processing Operations
- Ceramics
- Semiconductor
- Chemical Furnaces
- Petrochemical Furnaces

## Benefits:

**Stronger** – Users will benefit from a rugged design, extended battery life and faster exposure time.

**Simpler** – Increases operator efficiency, minimizing labor and maintenance cost.

**Safer** – Reduces risks of costly accidents and ensures operator safety. Reduces the risk of sensor overheating while minimizing repair costs and risk of process temperature failures.

## Laser Sighting Options



### Dual Laser

For precise measurement of smaller targets, the measurement spot is indicated by the two laser points.


### Red Nose

High temperature resistant plastic material nose features temperature sensor inside. If sensor is measuring critical temperature, alarm is given in the LCD of the 3i Plus.

### Red Dot Sighting

When the target is bright or red hot, the laser cannot be seen. The Red Dot light in the scope highlights the area with a red light indicating where the temperature is being measured.

## Optical Resolution

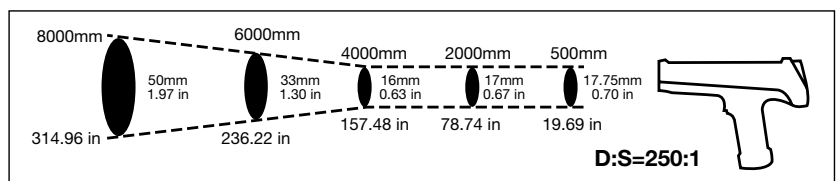



# Specifications and Features

Model	1M	2M
Temperature Range	700 to 3000 °C (1292 to 5432 °F)	400 to 2000 °C (752 to 3632 °F)
Accuracy	±(0.5 % of reading +1 °C) (<2700 °C/4892 °F)	
Repeatability	±(0.3 % or reading ±1 °C)	
Exposure Time	40 mSec	
Spectral Response	1.0 µm	1.6 µm
Emissivity*	0.10~1.00	
Operating Temperature	0 to 50 °C (32 to 120 °F)	
Relative Humidity	10 to 90 %, RH noncondensing @ 30 °C (86 °F)	
Storage Temperature	-20 to 60 °C (-4 to 140 °F) without batteries	
Dimensions (HxLxW)/Weight	Laser Models: 218 x 172 x 74 mm/700 g (8.5 x 6.7 x 2.9 in /1.5 lb) Scope Models: 218 x 222 x 74 mm/950 g (8.5 x 8.7 x 2.9 in /2.0 lb)	
Power	Single cell Lithium-ion, 3.6 V, 2500 mAh or via USB 2.0	
Battery Life (Lithion-Ion)	24 hours	
Laser	Laser beam for targeting (On/Off)	
Reflected Energy Compensation	✓	
Distance to Spot (D:S)	250:1	
MAX, MIN, DIF, AVG Temperatures	✓	
Backlit LCD	✓	
Temperature Display	°C or °F (selectable)	
Display Resolution	Below 1000 °C: 0.1 °C	
Locking Trigger	✓	
Tripod Mounting	✓	
Audible Alarms	Target temperature/Ambient temperature/Low battery	
Digital Outputs	USB 2.0, optional Bluetooth® 4.0** (USA/Canada: Bluetooth and USB standard)	
Data Logging	Up to 4,900 data points	
Spare Accessories	Carrying case • Neck Strap • Spare Lithium-ion rechargeable battery, 2.5 Ah • Mini USB port adaptor with multi-country power plug (100–240 VAC, 50/60 Hz) including SAA, EU, UK, US and CCC • Mini USB-to-DC jack converter for charging battery separately • Computer cable with USB-to-Mini USB, 1.5 m (4.9 ft)	

\* For more details, visit [www.raytek.com/emissivity](http://www.raytek.com/emissivity)

\*\* The Raynger 3i Plus is certified to the following RF standards:  
(CE) ETSI EN 300328 V1.8.1 (2012-06)  
(FCC) 47 CFR Part 15, Subpart C, RSS-GEN/RSS-210

Contact Raytek for a list of other countries where Bluetooth® is available for the 3i Plus

**Note: Non Bluetooth versions are not available in the USA and Canada**

## Fluke Process Instruments

### Americas

Santa Cruz, CA USA  
Tel: +1 800 227 8074 (USA and Canada, only)  
+1 831 458 3900

[solutions@flukeprocessinstruments.com](mailto:solutions@flukeprocessinstruments.com)

### EMEA

Berlin, Germany  
Tel: +49 30 4 78 00 80  
[info@flukeprocessinstruments.de](mailto:info@flukeprocessinstruments.de)

### China

Beijing, China  
Tel: +8610 6438 4691  
[info@flukeprocessinstruments.cn](mailto:info@flukeprocessinstruments.cn)

### Japan

Tokyo, Japan  
Tel: +81 03 6714 3114  
[info@flukeprocessinstruments.jp](mailto:info@flukeprocessinstruments.jp)

### Asia East and South

India Tel: ++91 22 2920 7691  
Singapore Tel: +65 6799 5578  
[sales.asia@flukeprocessinstruments.com](mailto:sales.asia@flukeprocessinstruments.com)

### Worldwide Service

Fluke Process Instruments offers services, including repair and calibration. For more information, contact your local office.

[www.flukeprocessinstruments.com](http://www.flukeprocessinstruments.com)

© 2016 Fluke Process Instruments  
Specifications subject to change without notice.  
11/2016 6004537B



B.L.W. Visser B.V.

Cromhoffsbleekweg 146 Tel: +31 (0)53 4319661  
7513 EW ENSCHEDE E-mail: [info@blwvisser.nl](mailto:info@blwvisser.nl)  
Nederland Internet: [www.blwvisser.nl](http://www.blwvisser.nl)



Raytek is an ISO 9001 certified company